


JF5系列

JF5系列底座封闭型接线座适用于频率为50Hz(或60Hz)，额定电压至660V，或直流440V，额定导线截面积为0.5~25mm²的圆导线作连接之用。采用接线方便的组合螺钉配用TU，TO端头，及通用的G型安装轨。



JF5-25/2

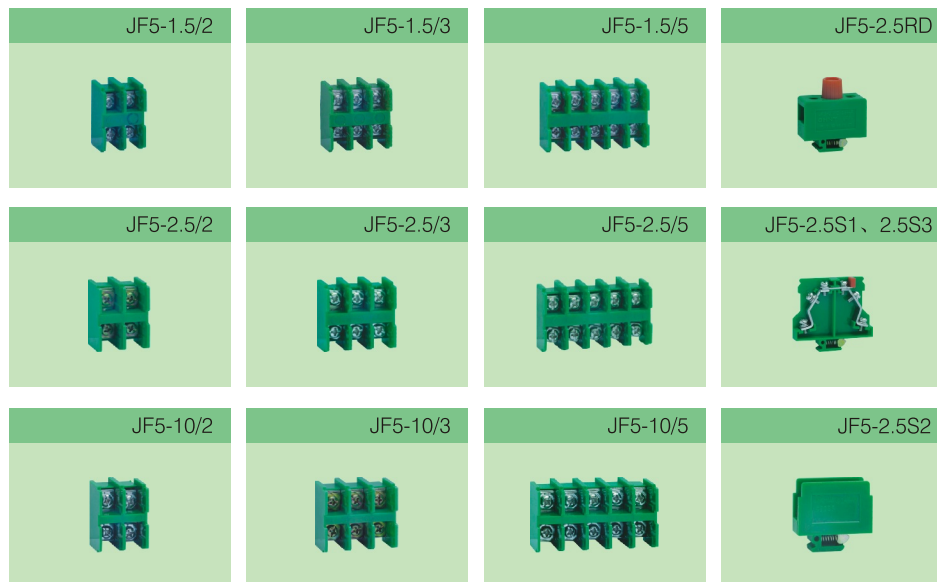

序号	产品型号	外形尺寸(mm)			安装轨 型式
		B	C	H	
1	JF5-1.5/1	30.5	10	31	G
2	JF5-1.5/10	30.5	130	36	G
3	JF5-1.5/2	30.5	19.5	31	G
4	JF5-1.5/3	30.5	28.5	31	G
5	JF5-1.5/5	30.5	46.5	31	G
6	JF5-1.5/2L	36	19.5	31	G
7	JF5-1.5/3L	36	28.5	31	G
8	JF5-2.5/1	36	13	32.5	G
9	JF5-2.5/10	36	161	39	G
10	JF5-2.5/2	36	24.5	33	G
11	JF5-2.5/3	36	36	33	G
12	JF5-2.5/5	36	59	33	G
13	JF5-2.5/2L	40	24.5	33	G
14	JF5-2.5/3L	40	36	33	G
15	JF5-2.5S1/1	60	10.5	54	G
16	JF5-2.5S1/10	60	155	61	G
17	JF5-2.5S2/1	41	12.5	40.5	G
18	JF5-2.5S2/10	41	170	46.5	G
19	JF5-2.5S3/1	60	10.5	54	G
20	JF5-2.5S3/10	60	155	61	G
21	JF5-2.5RD/1	46	20	51.5	G
22	JF5-2.5RD/10	46	250	57	G
23	JF5-6/1	45	16.5	42.5	G
24	JF5-6/10	45	195	49	G
25	JF5-6/2	32	45	40.5	G
26	JF5-6/3	46	49	43	G
27	JF5-6/5	46	80	43	G
28	JF5-10/1	50	19	50.5	G
29	JF5-10/10	50	225	56	G

续上表

序号	产品型号	外形尺寸(mm)			安装轨 型式
		B	C	H	
30	JF5-10/2	50	36	50.5	G
31	JF5-10/5	50	92	50.5	G
32	JF5-25/1	61.5	24	52	G
33	JF5-25/10	61.5	155	58	G
34	JF5-25/2	61.5	50	52	G
35	JF5-1.5B	61.5	50	52	G
36	JF5-2.5B	61.5	50	52	G
37	JF5-2.5JD/1	61.5	50	52	G
38	JF5-2.5JD/10	61.5	50	52	G