

图 1 Y10WF2-72.5 型外形和安装尺寸
Fig.1 Y10WF2-72.5 Outline, Mounting dimensions

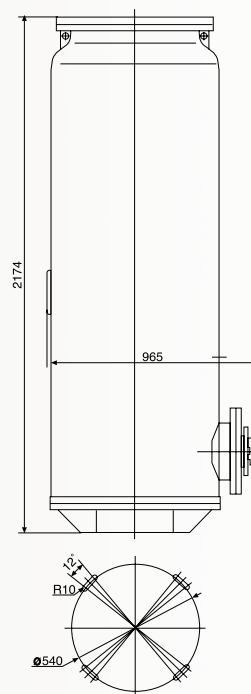


图 2 Y10WF2-200 型外形和安装尺寸
Fig.2 Y10WF2-200 Outline, Mounting dimensions

Y10WF2 系列金属氧化物避雷器主要技术参数

Main Technical Parameters of Y10WF2 Series MOA

型号 Type	避雷器 额定 电压 Rated voltage of arrester kV(rms)	系统 额定 电压 Rated voltage of system kV(rms)	避雷器 持续运 行电压 Continuous operating voltage of arrester kV(rms)	直流 1mA 参考电压 不小于 kV DC1mA reference voltage not less than kV	8/20μs 10kA 雷电冲击 电流残压 8/20μs 10kA lightning impulse residual voltage not more than kV (peak)	30/60μs 500A 操作冲击 电流残压 30/60μs 500A switching impulse residual voltage not more than kV (peak)	2000μs 方波通流 容量 18 次 A (峰值) Discharge capacity of rectangular wave 2000μs 18 times A (peak)	4/10μs 冲击大电流 2 次 kA (峰值) 4/10μs impulse high current 2 times kA (peak)	外形尺寸 宽 x 高 Outline Dimensions B x H	重量 kg Weight kg
	kV (有效值)				kV (峰值) 不大于					
Y1.5WF2-72/186	72	110	58	103	186	174	400,600	100	710 x 1423	246
Y10WF2-100/260	100	110	73	145	260	221	600	100	710 x 1423	246
Y10WF2-200/520	200	220	146	290	520	442	800		965 x 2174	555