


LXW24 series micro-switch

LXW24 系列微动开关

This kind of switch is apply to AC 50HZ, voltage to 250V,DC voltage to 30V control circurt. It plays limit-protection and interlocking role in the circuit.This kind of switch is widely used in the field of Automobile industry、electric appliances and office stationery.The switch has a group of single breakpoint change-over contact with good enclousure protecton capabltty(protection category:IP65),automatic reset structure.The actuator can be classified into plunger,lever,roller lever,etc

LXW24 系列微动开关适用于交流 50Hz、电压至 250V、直流电压至 30V 的控制或辅助电路中，作控制、信号、联锁之用。广泛应用于汽车行业、家用电器和办公设备等。开关具有一组单断点转换触头，具有较好的外壳防护能力（防护等级为 IP65）和自动复位的密封型结构，接线方式为护套引出线。开关的驱动型式分柱塞型、杠杆型和滚轮杠杆型等多种。

① The style sketch

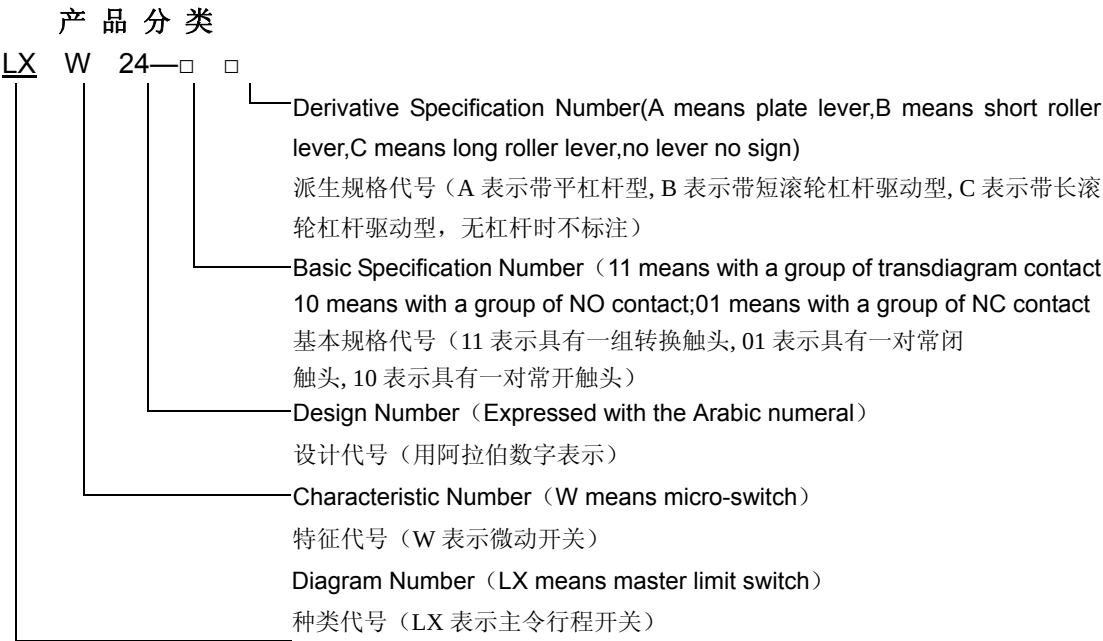


②specification

技 术 参 数

rated insulation voltage 额定绝缘电压	AC 250V
rated working voltage 额定工作电压	AC 250V、DC 250V
rated working current 额定工作电流	AC-12 10A、DC-12 0.5A
power-frequency withstand voltage 工频耐压	2000VAC
contact resistance 接触电阻	≤30 mΩ
Mechanical life(cycles) 机械寿命 (次)	>300,000 cycles
Electrical life(cycles) 电气寿命 (次)	>100,000 cycles

③Wiring diagram

接 线 形 式

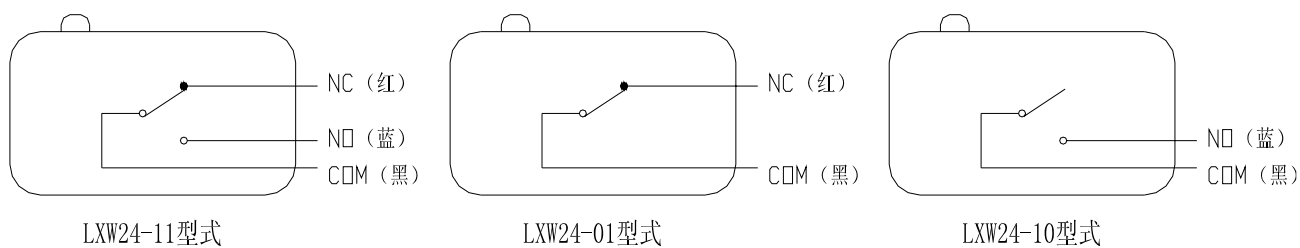

④DIMENSIONS AND FIXING SIZE

外形及安装尺寸及技术参数

