

## LXW26 series limit switch

### LXW26 系列微动开关


LXW26 series micro-switch is apply to AC 50HZ, rated working voltage AC 250V control circuit. It plays limit-protection、Signal and interlocking in the circuit. It is widely used in the field of electric appliances and electric power. LXW26-10Z can be pair with LXW26-01B.

LXW26 系列微动(行程)开关适用于交流 50Hz 额定工作电压 AC 250V 的控制或辅助电路中。作控制、信号、联锁之用，广泛应用于电力行业或家用电器中。

LXW26-10Z 与 LXW26-01B 可配对使用

#### ① The style sketch

#### 产品分类

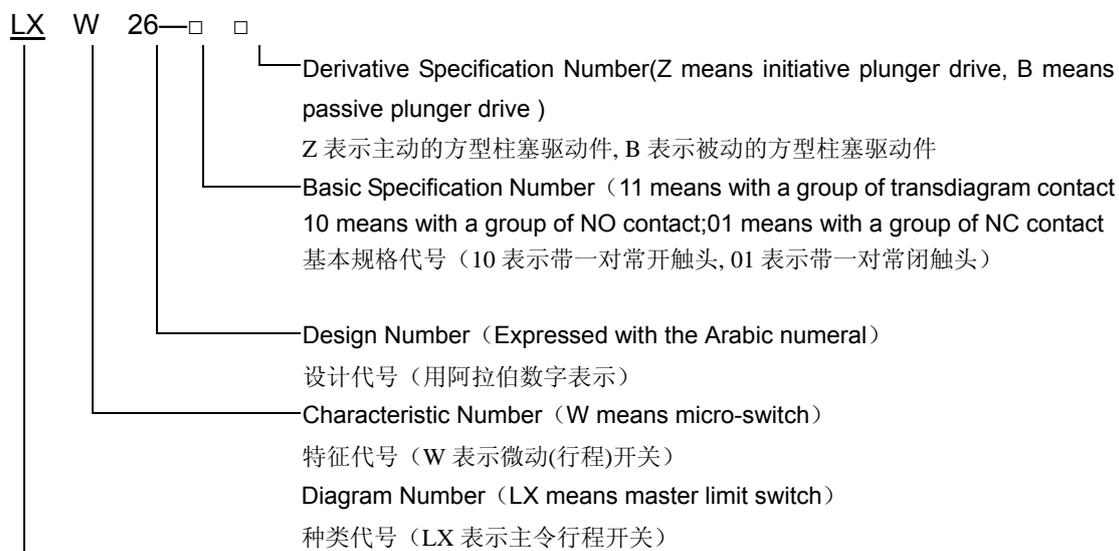


## ②specification

### 技术参数

<b>rated insulation voltage</b> 额定绝缘电压	<b>AC 250V</b>
<b>rated working voltage</b> 额定工作电压	<b>AC 250V</b>
<b>rated working current</b> 额定工作电流	<b>AC-12 5A、AC-15 2A</b>
<b>power-frequency withstand voltage</b> 工频耐压	<b>2000VAC</b>
<b>contact resistance</b> 接触电阻	<b>≤30 mΩ</b>
<b>Mechanical life(cycles)</b> 机械寿命 (次)	<b>&gt;1000,000 cycles</b>
<b>Electrical life (cycles)</b> 电气寿命(次)	<b>&gt;50,000 cycles</b>



## ③Terminal diagram

### 接线端子形式

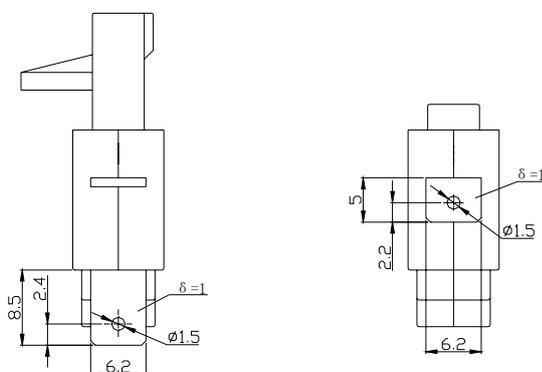



#### ④DIMENSIONS AND FIXING SIZE

#### 外形与安装尺寸及技术参数

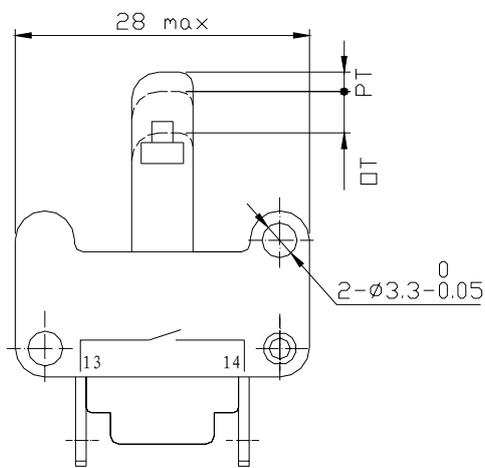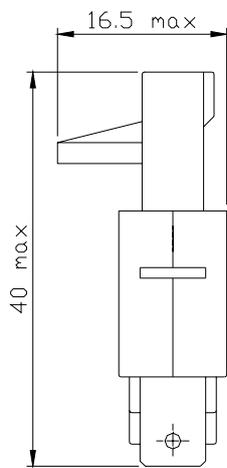

OF	$\leq$	1 N
RF	$\geq$	0.5 N
PT	$\geq$	1 mm
OT	$\geq$	1.5 mm

LXW26-10Z

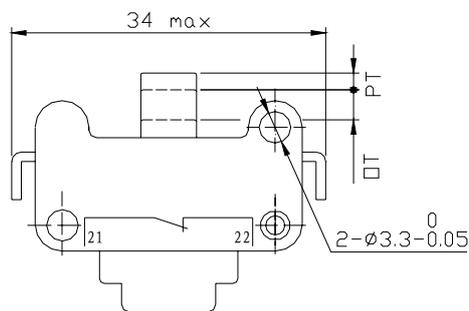

OF	$\leq$	1 N
RF	$\geq$	0.5 N
PT	$\geq$	1 mm
OT	$\geq$	1.5 mm

LXW26-01B